



US 20050195054A1

(19) **United States**

(12) **Patent Application Publication**
Jackson

(10) **Pub. No.: US 2005/0195054 A1**

(43) **Pub. Date: Sep. 8, 2005**

(54) **SELF-ENERGIZING ELECTRICAL CONNECTION**

(52) **U.S. Cl. 335/16**

(75) **Inventor: Douglas K. Jackson, Austin, TX (US)**

(57) **ABSTRACT**

Correspondence Address:
ROSS SPENCER GARSSON
WINSTEAD SECHREST & MINICK P.C.
P. O. BOX 50784
DALLAS, TX 75201 (US)

An electrical connector includes first and second conducting members which are pivotally attached to each other. A portion of the first and second conducting members distal to the pivotal attachment form an electrical contact with the electrode. The first and second conducting members, when operably connected to electric power source, provide parallel current paths for an electric current from the power source to the electrode. The contact is preloaded. Further, the first and second conducting members are configured to provide additional forces at the contact with the electrode in response to the current flow, the additional forces having at least a predetermined value when a value of the electric current has a preselected value. For example, the predetermined value of the additional forces may be determined, using known properties of electrical contacts, so as to ensure that the contact does not fail when the current reaches the preselected value.

(73) **Assignee: Nanotechnologies, Inc., Austin, TX (US)**

(21) **Appl. No.: 11/071,808**


(22) **Filed: Mar. 3, 2005**


Related U.S. Application Data

(60) **Provisional application No. 60/549,840, filed on Mar. 3, 2004.**

Publication Classification

(51) **Int. Cl.⁷ H01H 75/00**

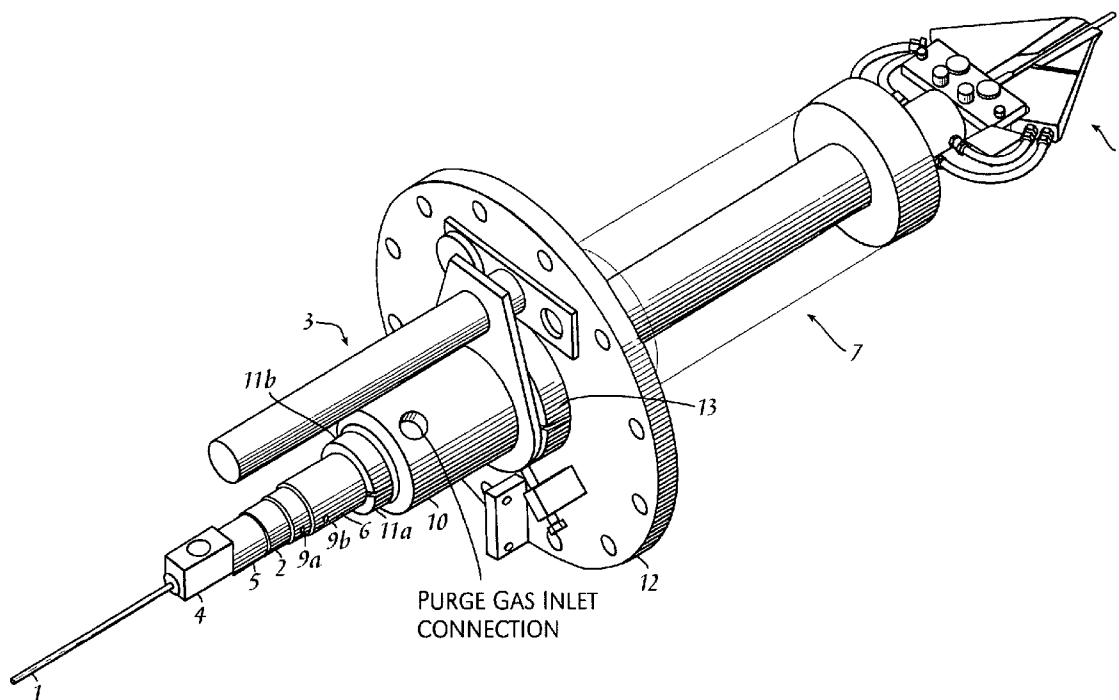

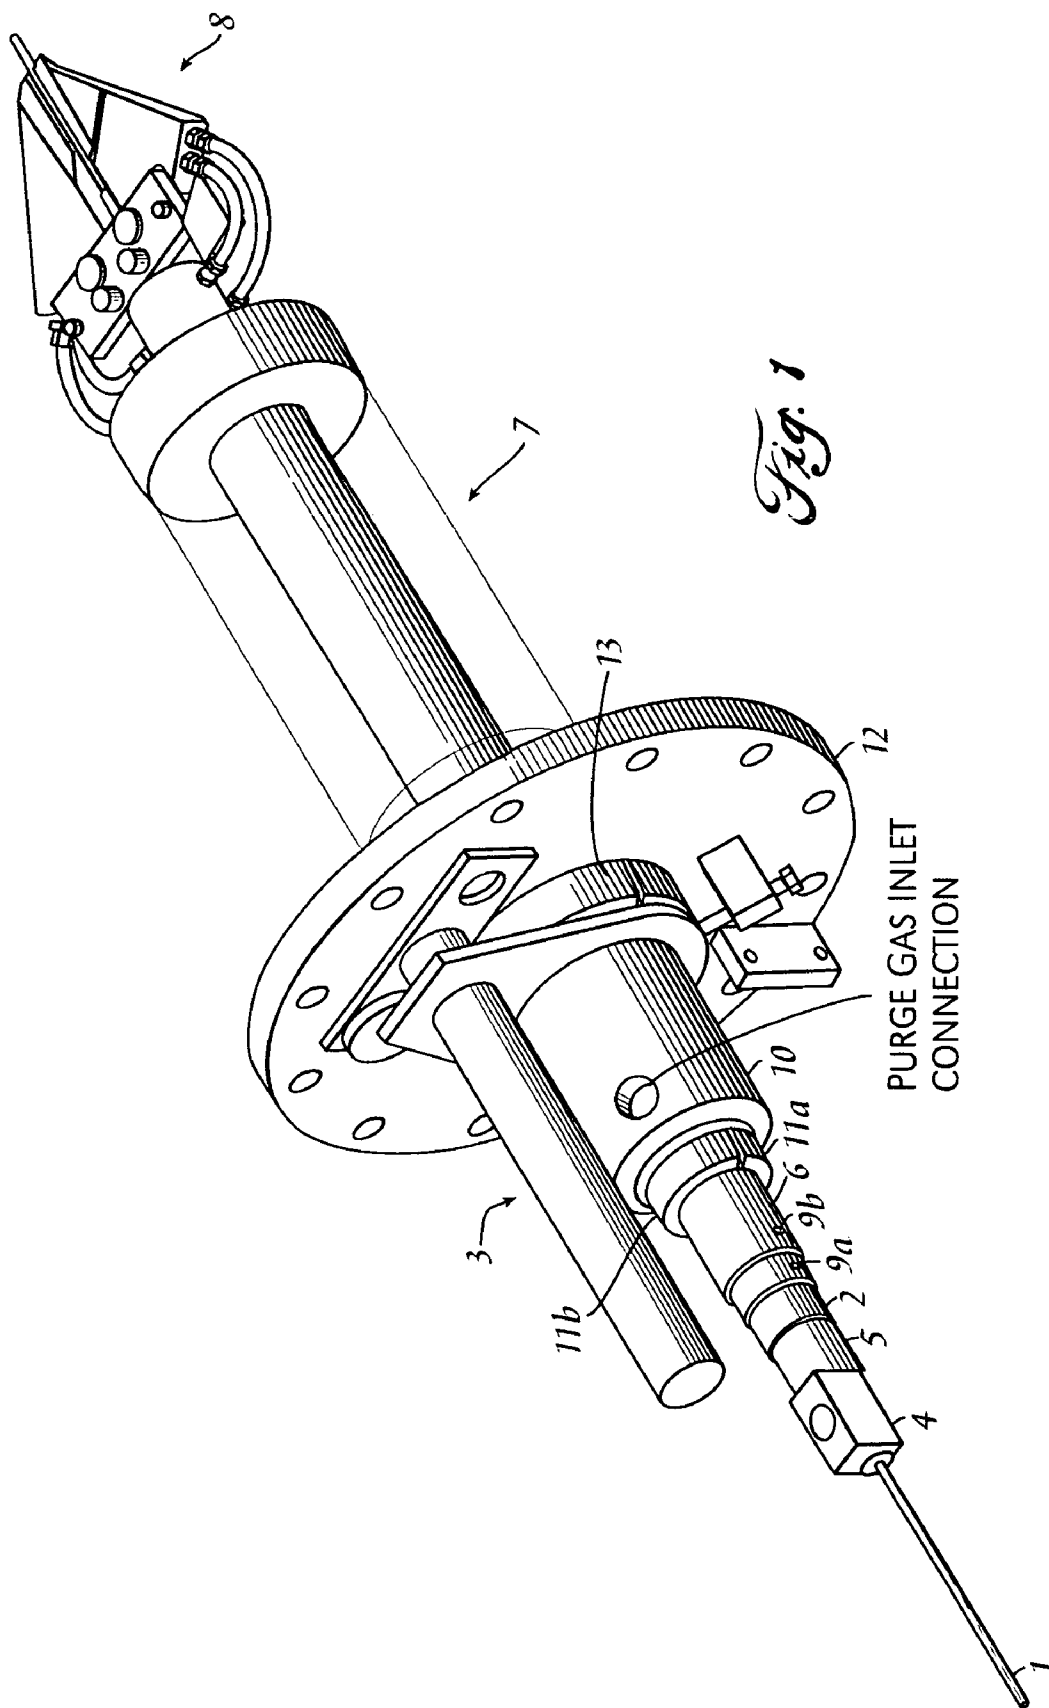

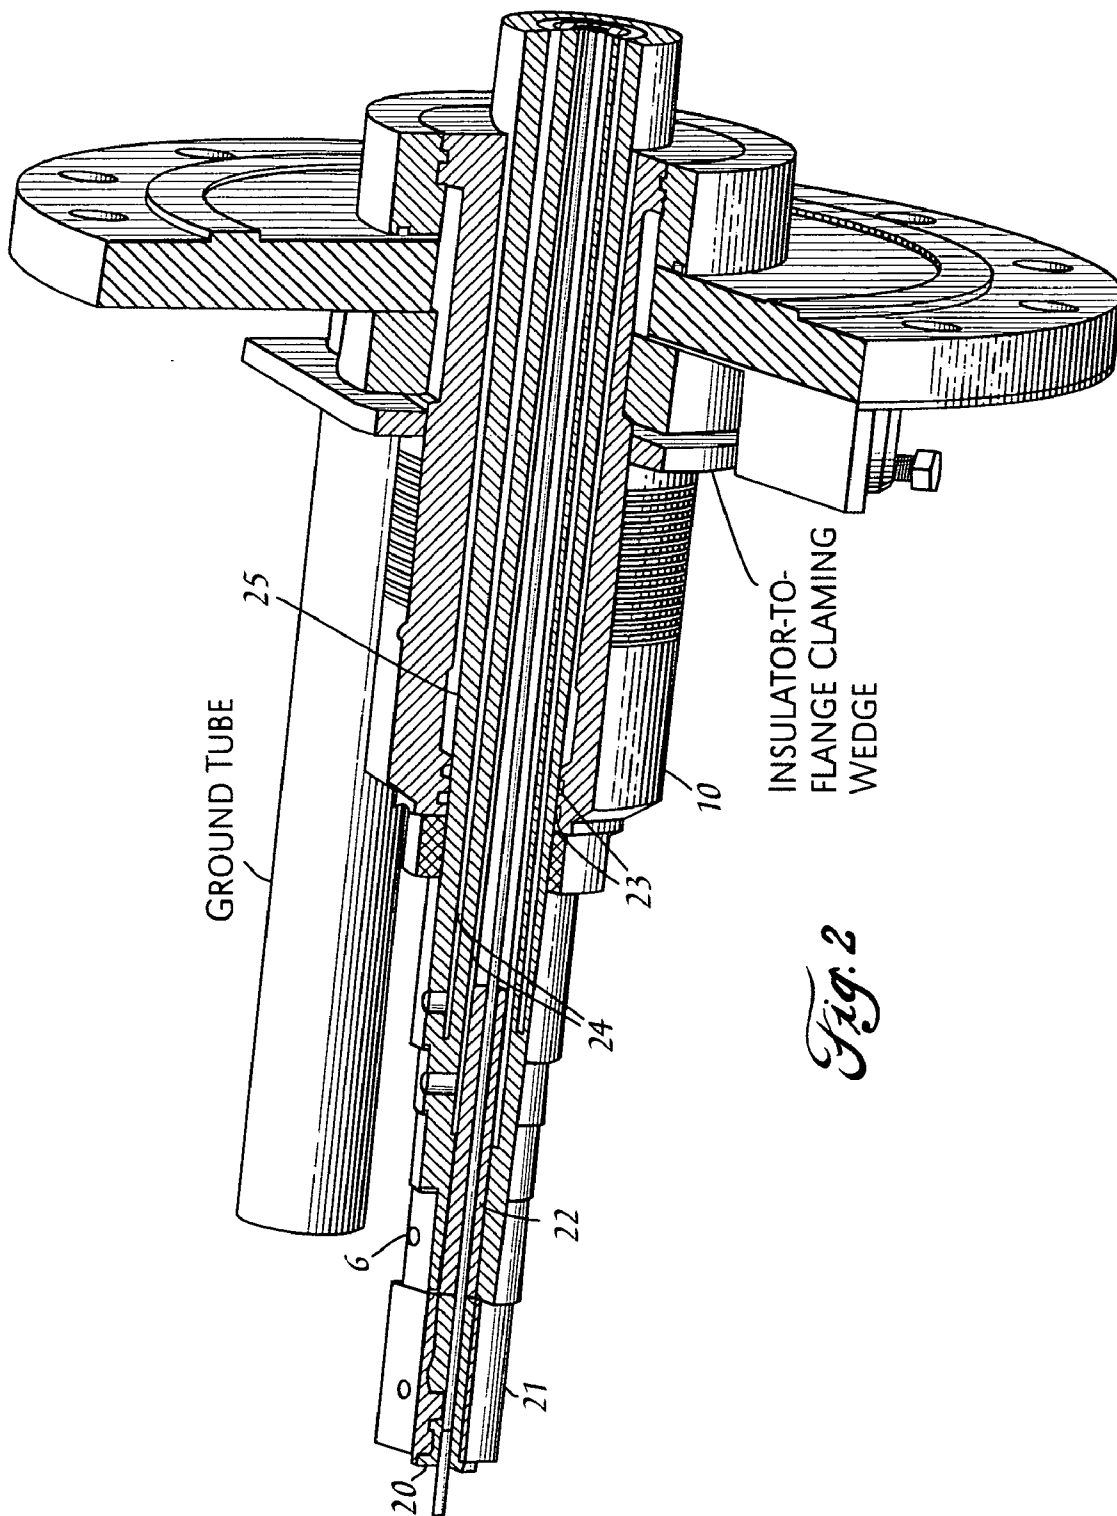


Fig. 2

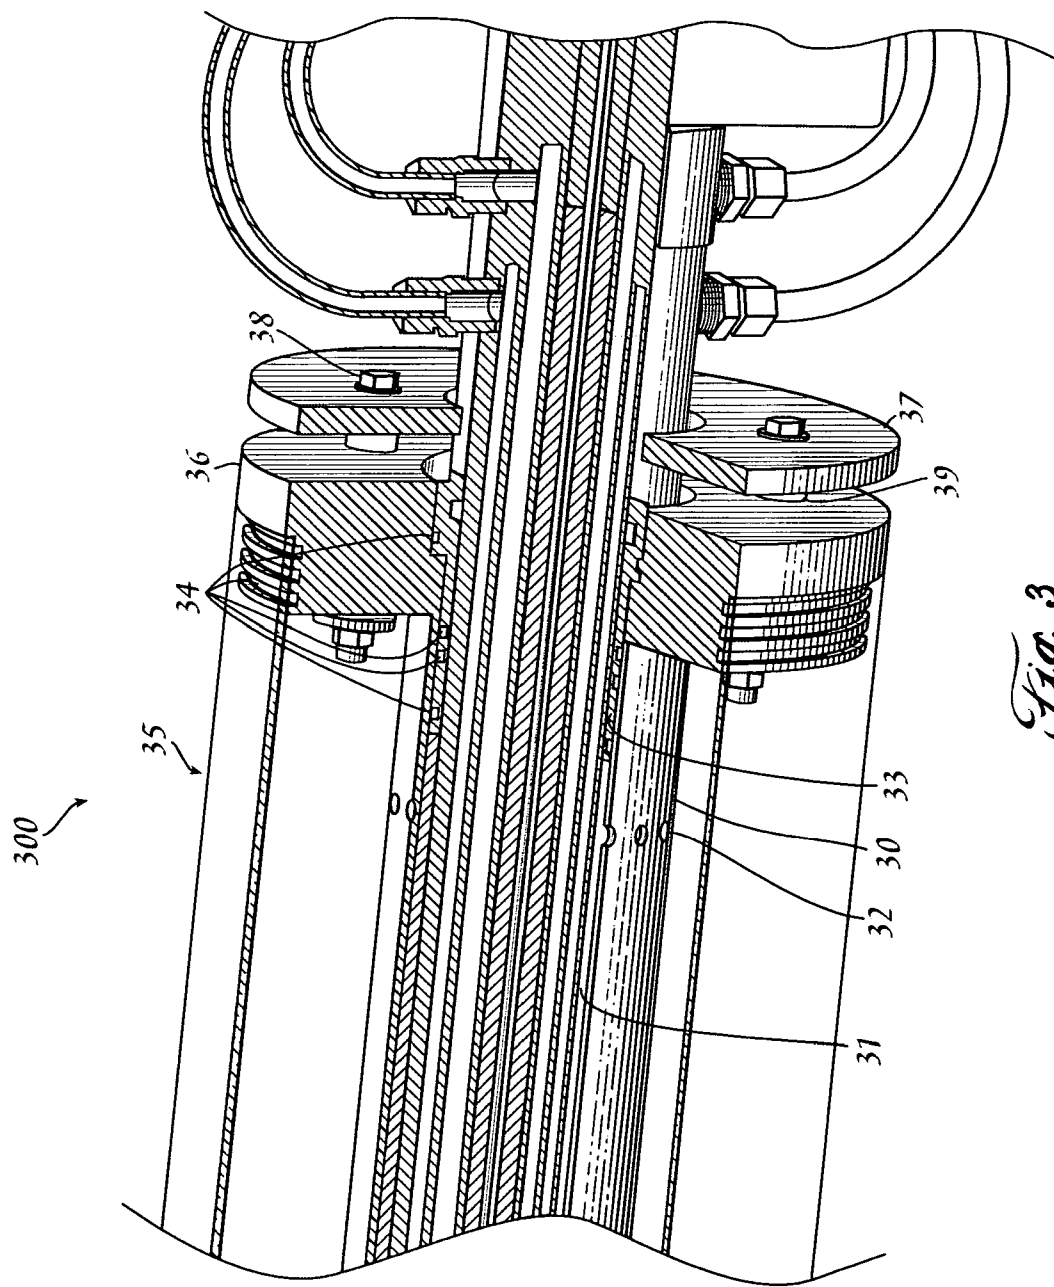
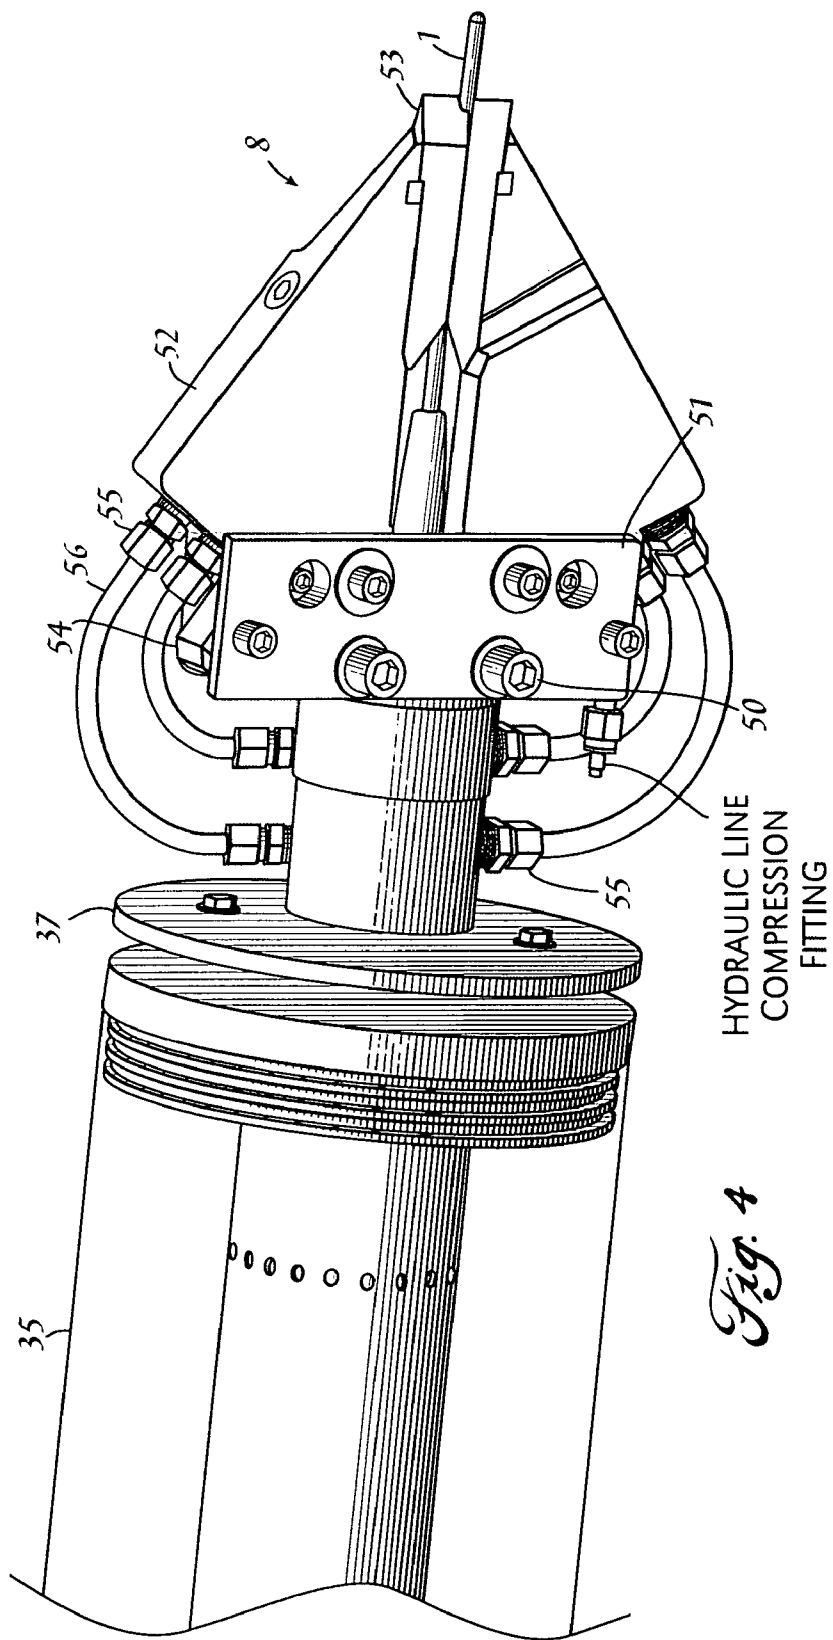


Fig. 3



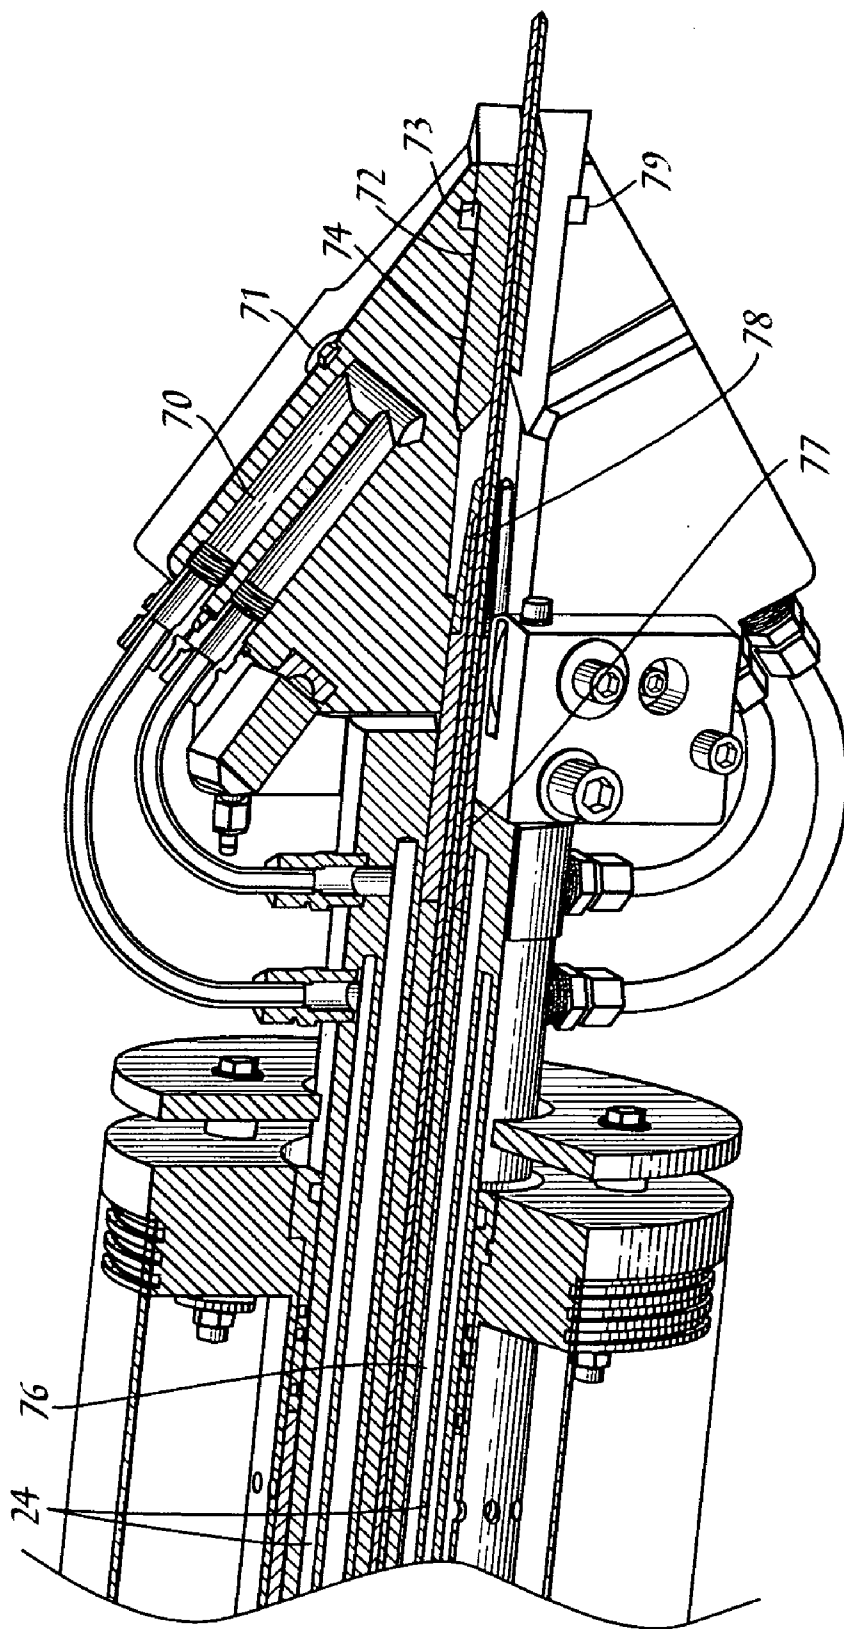


Fig. 5

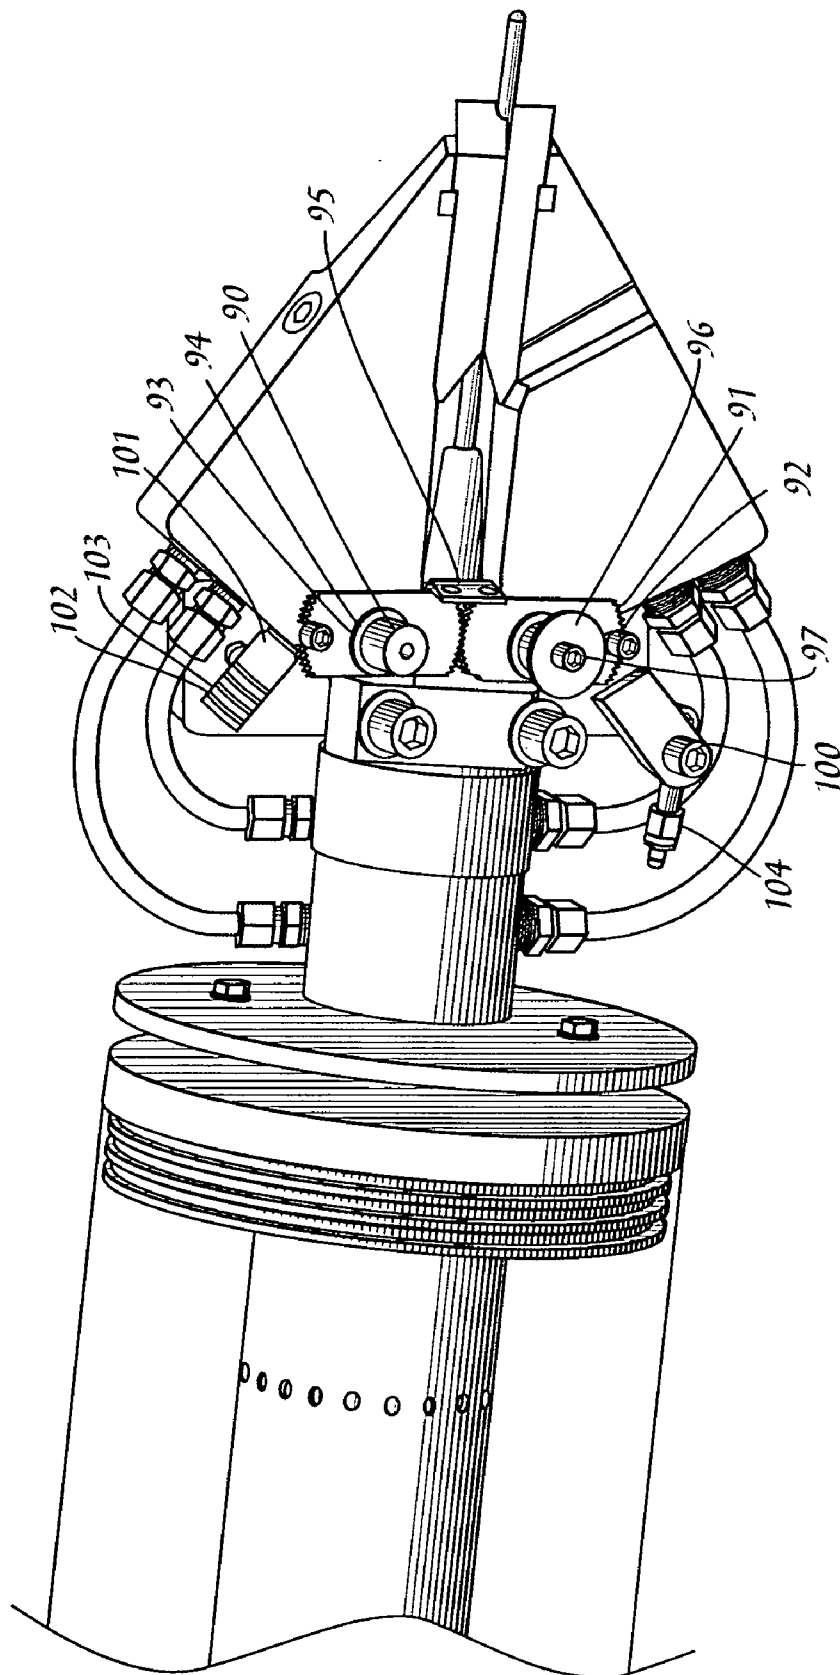


Fig. 6

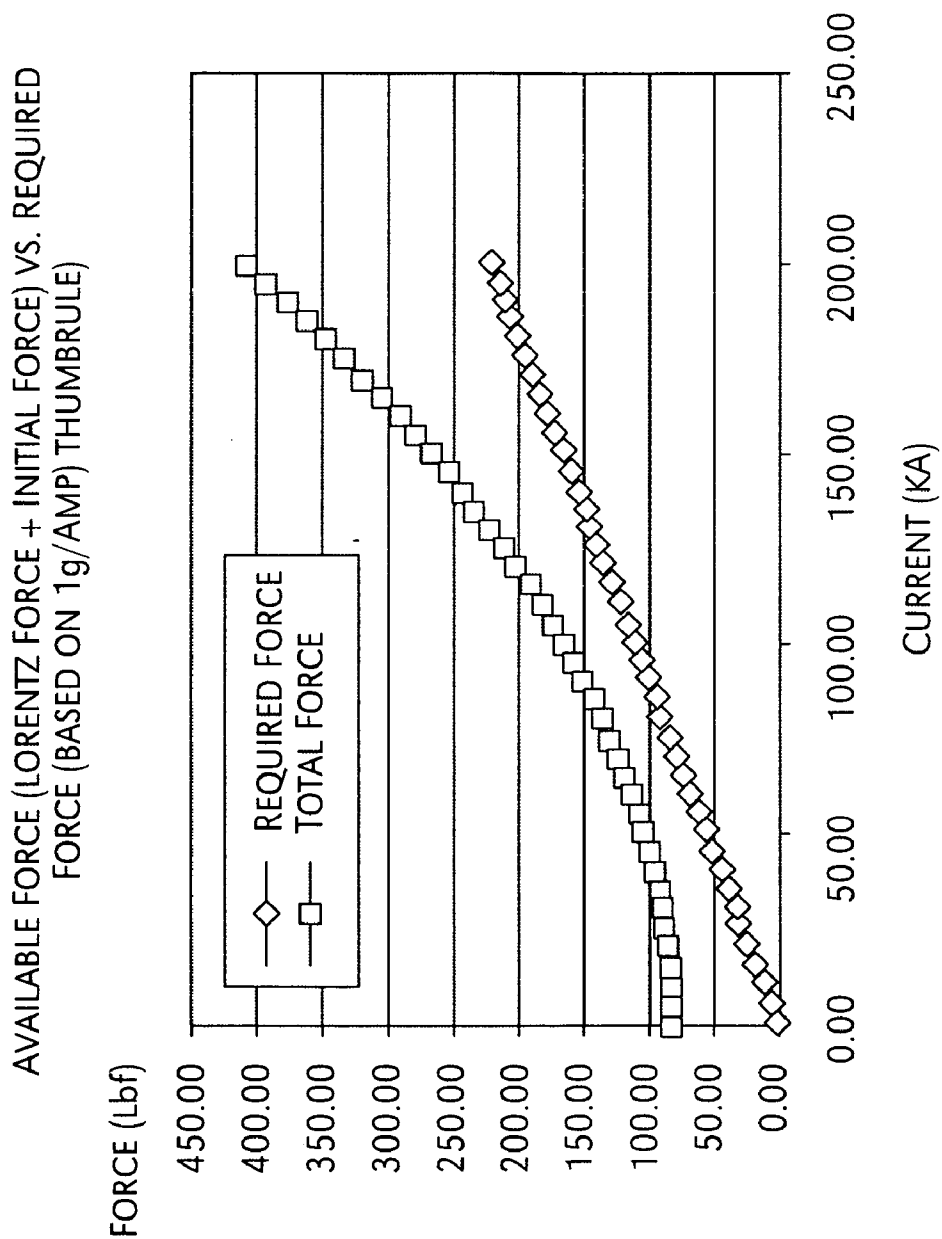


Fig. 7

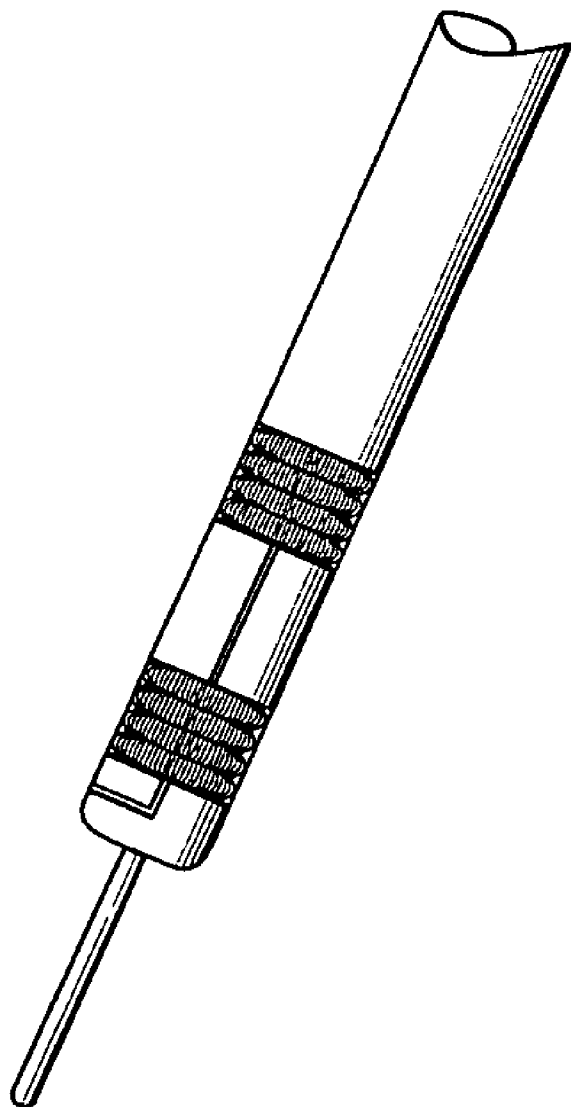


Fig. 8


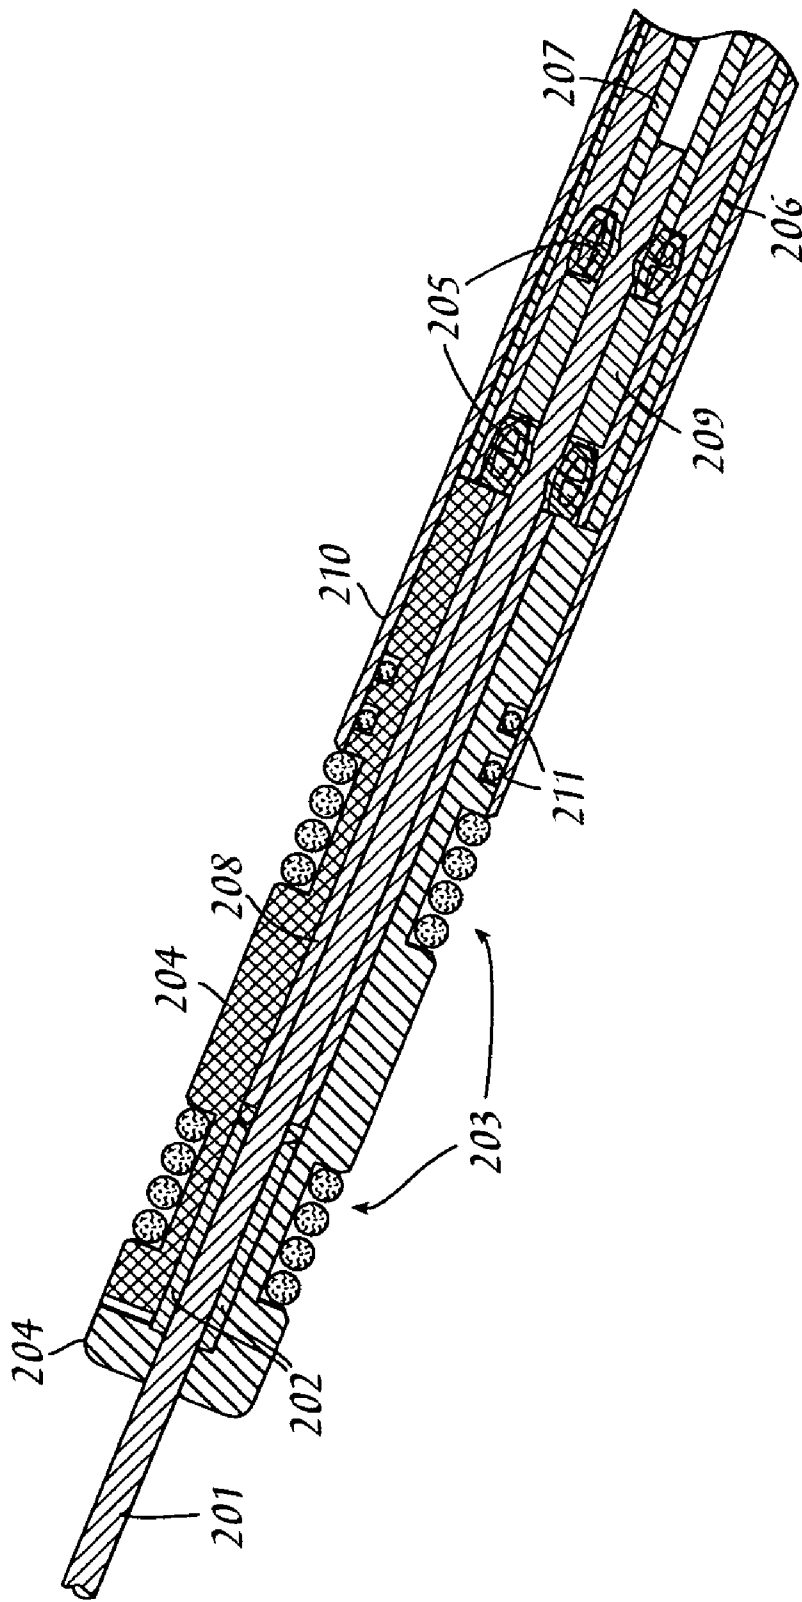


Fig. 9

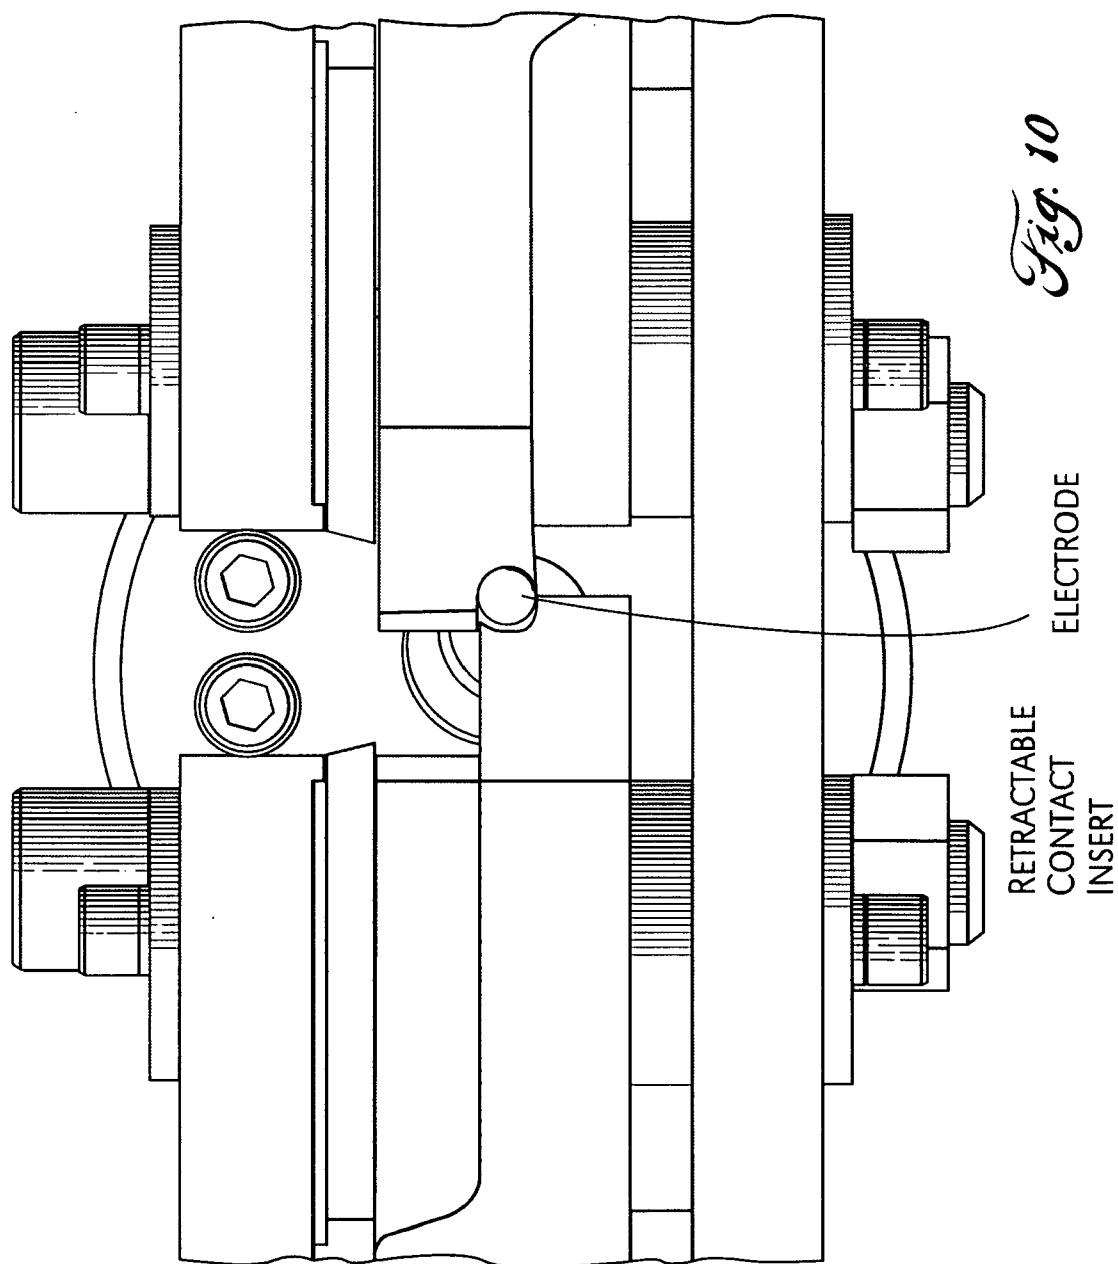

SELF-ENERGIZING ELECTRICAL CONNECTION

CROSS REFERENCE TO RELATED APPLICATION

[0001] This application is related to the commonly owned copending U.S. Provisional Patent Application Ser. No. 60/549,840, "SELF ENERGIZING ELECTRICAL CONNECTION," filed Mar. 3, 2004, and claims the benefit of its earlier filing date under 35 U.S.C. §119(e).

TECHNICAL FIELD

[0002] The present invention relates generally, to electrical connections and in particular, to self-energizing contacts, whereby a force of contact between electrical conductors forming the electrical contact dynamically adapts to the current through the contacts, and a contact preload permits relative motion between contacting surfaces without damage to the contacts.

BACKGROUND

[0003] Electrical connections are an important aspect of many designs. Typical electrical connections include soldering, clamping and lugs. In order to provide reliable long-term connections, good physical contact between the electrical conductors must exist. Soldering accomplishes this by wetting and bonding to the connectors with an electrically conductive material. Clamping and lugs provide a physical force between the conductors to insure intimate contact. If there is not sufficient contact force between the conductors, localized arcing and/or oxidation of the surfaces can occur, resulting in an unreliable connection. For low current static connections, the required contact force to provide a reliable connection is small and can easily be achieved.

[0004] For static electrical connections of intermediate and high currents, the required contact force is proportionally higher. (As used herein, "high current" is generally a current at least about 1000 A). Consequently, one must pay closer attention to this contact force because of the potential for arcing to cause physical damage to the connection and render it useless. Typically, these types of connections are bolted together or mechanically clamped and contact surfaces are treated to minimize corrosion.

[0005] For high current pulsed electrical connections, the load on the connection resulting from the current is cyclical and the effects of fatigue and creep must be considered. Over time, if not properly maintained, the contact force will diminish and an arc will occur in the connection resulting in permanent damage.

[0006] In the field of pulsed power—in which electricity is modulated at high voltage, high current (i.e., high power), and done so over a short time scale—these types of problems are greatly amplified. A short time scale is defined as the regime where thermal, mechanical and magnetic effects do not approach steady state during the discharge (such as, generally less than about 100 ms and, more generally, less than about 10 ms). The forces generated in a connection are large and make fatigue and creep a major problem. For high current electrical contacts, it is generally empirically understood that a minimum of one gram of force be applied per ampere (1 g/A) of current between two surfaces (this is commonly referred to as "Marshall's Law") or an electric

arc will spontaneously form between the surfaces and destroy them. For example, the minimum force required between two surfaces passing a 100,000 A current would be 100 kg or about 220 pounds (lbs.) force. A person of ordinary skill would understand that Marshall's law is a rule of thumb used within the pulsed power industry. If a connection fails due to insufficient contact force, an electric arc will be formed between the two surfaces. The resistance of the arc is generally higher than the contact resistance between the surfaces. Since the energy deposited in a resistor due to current flow is proportional to the square of the current, proportionally more energy is deposited in the interface. If the power deposited in the arc is high enough, the contact material surface can be heated high enough to form a high-pressure plasma between the interface. The high pressure can explosively blow the interface apart, rendering it ineffective as an electrical connection. In addition, its surrounding may be damaged. This process is not too dissimilar to an explosion. For industrial systems, this can result in a loss of equipment, significant equipment downtime and potentially harm personnel.

[0007] The reliability of an electrical connection in these environments can be increased by minimizing the contact resistance between the surfaces such as coating the contact surfaces with a highly conductive material such as silver or applying a corrosion inhibitor to the surfaces. Adequate contact force can be made more reliable by using a compliant preload such as one provided by bolts with Belleville washers. These solutions generally work well when the connections are meant to last a long time without servicing. One such integral solution is known by the brand name of Multilam™ (available from Multi-Contact USA of Santa Rosa, Calif.), which minimizes contact resistance between two surfaces by providing multiple, compliant contact points between them. It contains many small louvers made from a spring material that is sandwiched between the surfaces. Each louver acts as a single contact point for each surface. Each louver can act somewhat independently of the others, so it is much more tolerant to surface imperfections, creep and applied clamping force. Since dozens or even hundreds of contact points can be provided in a small contact area, Multilam™ improves contact resistance and reliability over that predicted by a-spot theory which states that no more than three electrical contact points can be guaranteed when two flat surfaces are clamped together. However, because each louver forms essentially a line or point contact, a high contact pressure is imparted and often damages the mating contact surfaces. This problem limits Multilam™ from being used reliably for high current density applications in which the mating surfaces are being moved relative to each other on a repeated basis. (As used herein, the "current density" is current divided by the cross sectional area of the contact; a "high current density" is generally at least about 10,000 A/cm².)

[0008] The above discussion has been centered around static electrical connections. For dynamic connections, in which one surface is moved relative to another while maintaining contact (such as sliding or rotating) one is faced with the additional problem of having adequate preload to prevent arcing between the contacts coupled with the fact that the preload cannot be so high that static friction prevents the surfaces from moving relative to each other. (Such a dynamic connection will also be referred to as a "dynamic contact.") Furthermore, small imperfections in the surfaces

leave them more prone to arcing than nonmovable contact surfaces. This problem is exacerbated when the surface area of the contacts becomes so small that the required preload to prevent arcing nearly deforms the surfaces thereby reducing their lifetime and making them prone to arcing. This problem is also exacerbated when the cross sectional area of the conductor to which it is desired to couple power becomes so small that it becomes difficult to push it through the coupler without buckling it.

[0009] In short for dynamic high current applications it is desirable to have the surfaces continually in contact allowing them to slide relative to each other, but have the required clamping force applied to the surfaces only when current is pulsed through them. Extreme care must be taken to make sure that sufficient clamping force is applied every time that the current is pulsed through the contact. One failure may be catastrophic.

[0010] All of these connections have one factor in common; they require a high preload force that must be well maintained to prevent catastrophic failure. Because of this, their application in movable electrical contacts in pulsed power applications is limited. Additionally, if the connection sees a current that exceeds its designed clamping force, then the connection will fail.

[0011] Thus, there is a need in the art for a mechanism to provide a clamping force in moveable electrical contacts sufficient to prevent catastrophic arcing at the contact while high current is flowing but which permits freedom of relative sliding movement of the contacting conductors when little or no current is flowing. Additionally, there is a further need in the art for a clamping force that adapts to the current carried by the contact.

SUMMARY

[0012] Disclosed is a system and method for electrically coupling a high power, pulsed power delivery system to a conductor that is indexed repetitively or continuously relative to the coupler. For instance, the system can be cycled at high peak current ($\sim 10^5$ A or greater) for moderate pulse lengths (~ 10 ms or less and, more generally, 1 ms or less) at high repetition rate (greater than about 0.1 Hz and, more generally greater than about 1 Hz) for many cycles (greater than about 10^5 and, more generally, greater than about 10^6).

[0013] This invention addresses the general problem of coupling high power, pulsed power to a small conductor that is indexed relative to the coupler. When it is desired to pass a large current through a small cross-section conductor that is pushed through a coupler, a problem occurs; the required minimum preload force to maintain a nonarcing electrical connection between the small conductor and the coupler is so great that the conductor buckles or the contact surfaces are mechanically deformed or galled. The present invention addresses this problem by:

[0014] A. Applying a small static force (i.e., generally less than that required by Marshall's Law for the maximum operating current) between the contact surfaces. Since the conductor may be sliding and there may be minor deformations in the thickness of the conductor, the static force must be compliant to guarantee that there is always a force and therefore a nonarcing electrical connection between the sur-

faces. This is done so that arcing does not occur when the current first starts to flow. That is, the force must be like the force provided by a spring, a hydraulic force, or the like: minor changes in the dimensions of the clamp do not significantly affect the force that it applied.

[0015] B. Applying a dynamic self-energizing force that increases with the current flowing through the connections. In an embodiment of the invention, this force is a Lorentz force that is provided by the interaction of the current through the coupler and its self magnetic field. This force, which is proportional to the square of the current, causes the coupler to clamp the conductor only during the current discharge.

[0016] The foregoing has outlined rather broadly the features and technical advantages of the present invention in order that the detailed description of the invention that follows may be better understood. Additional features and advantages of the invention will be described hereinafter which form the subject of the claims of the invention.

BRIEF DESCRIPTION OF DRAWINGS

[0017] For a more complete understanding of the present invention, and the advantages thereof, reference is now made to the following descriptions taken in conjunction with the accompanying drawings, in which:

[0018] FIG. 1 illustrates a perspective view of a self-energizing electrical connection in accordance with an embodiment of the present invention;

[0019] FIG. 2 illustrates a cutaway view of a rear insulator assembly portion of the self-energizing electrical connection in accordance with the embodiment of FIG. 1;

[0020] FIG. 3 illustrates a cutaway view of a front insulator assembly portion of the self-energizing electrical connection in accordance with the embodiment of FIG. 1;

[0021] FIG. 4 illustrates in further detail a gripper portion of the self-energizing electrical connection in accordance with the embodiment of FIG. 1;

[0022] FIG. 5 illustrates a cutaway view of the gripper portion of FIG. 4;

[0023] FIG. 6 illustrates another cutaway view of the gripper portion of FIG. 5;

[0024] FIG. 7 graphically illustrates the contact force as a function of current carried by the connector in accordance with the present inventive principles;

[0025] FIG. 8 illustrates an external view of an alternative embodiment of the invention;

[0026] FIG. 9 illustrates a section view of the alternative embodiment of the invention illustrated in FIG. 8; and

[0027] FIG. 10 illustrates a close-up view of the contact insert illustrated in FIG. 4.

DETAILED DESCRIPTION

[0028] The present invention addresses these problems, by incorporating a self-energizing clamping force. The connection requires a moderate preload and uses the applied current

to generate a Lorentz force that applies the remainder of the required force to prevent catastrophic failure. The moderate preload is such that the two contact surfaces can be moved relative to each other without damaging the components while the self-energizing feature provides sufficient clamping force to maintain a nonarcing electrical connection when the current is applied. Additionally, because the self-energizing force is proportional to the square of the applied current, the connection is much more tolerant to over-current conditions.

[0029] In the following description, numerous specific details are set forth to provide a thorough understanding of the present invention. However, it will be obvious to those skilled in the art that the present invention may be practiced without such specific details. In other instances, well-known circuits have been shown in block diagram form in order not to obscure the present invention in unnecessary detail. For the most part, details concerning timing considerations and the like have been omitted inasmuch as such details are not necessary to obtain a complete understanding of the present invention and are within the skills of persons of ordinary skill in the relevant art.

[0030] Refer now to the drawings wherein depicted elements are not necessarily shown to scale and wherein like or similar elements are designated by the same reference numeral through the several views.

[0031] FIG. 1 illustrates a self-energizing electrical coupler in accordance with an embodiment of the present invention. The coupler may be used to provide high current, pulsed power to an indexable consumable electrode 1. (Electrode 1 may, for example, be used as a feedstock for making nanomaterials in accordance with the methodology described in the commonly owned U.S. Pat. No. 6,777,639, hereby incorporated herein by reference).

[0032] However, the coupler may be used to provide a dynamic contact in any system requiring an electrical contact allowing a relative motion between the contacting electrical conductors forming the contact.

[0033] The high current, pulsed power system is electrically connected to coupler at the primary electrical connection point 2 and at the ground connector assembly 3. The electrode 1 is indexed through the check valve 4 using a feed mechanism (not shown) attached at connection point 5. In the application of the coupler to the production of nanopowders noted above, check valve 4 permits the removal or replacement of electrode 1 while the coupler remains in place in the production system which is typically operated at a pressure slightly greater than atmospheric. Electrode 1 passes through the conductor/coolant manifold 6 and the insulator assembly 7 and into the gripper assembly 8. The conductor/coolant manifold 6 has an inlet coolant port 9a and an outlet coolant port 9b to actively cool and remove the heat generated by the high currents and power. The conductor/coolant manifold 6 is electrically insulated from the ground connector assembly 3 by means of the main insulator 10. Conductor/coolant manifold 6 can move axially relative to the main insulator to adjust the position of gripper assembly 8. The position of the conductor/coolant manifold 6 is locked by means of insulator clamp 11a and a heavy duty hose clamp 11b (not shown). The main insulator 10 is attached to the flange 12 by means of the insulator-to-flange clamping wedge 13. Insulator 10 may be fabricated from

common MDS filled nylon in an embodiment of the coupler. Insulator-to-flange clamping wedge 13 allows the main insulator 10 and consequently the rest of the assembly to move relative to the flange 12 and to lock it in place. A heavy-duty hose clamp (not shown) may be used to provide the clamping force on clamping wedge 13. This allows accurate positioning of the electrode tip. Flange 12 may be 150 lb stainless ANSI flange. In one embodiment of the coupler, flange 12 has a diameter of fourteen inches (14"), however the characteristics of flange 12 do not implicate the present inventive principle and may be reflective of the application environment of the coupler.

[0034] FIG. 2 shows a cut-away view of the main insulator 10 and the surrounding components. A rear electrode seal cartridge 20 is positioned where the electrode 1 enters the conductor/coolant manifold 6 and a main seal cartridge 22 positioned with the conductor/coolant manifold 6 to provide a pressure seal around the electrode. In an embodiment of the present invention used in a pressurized environment, such as nanoparticle production using the aforementioned methodology, any gas inside a reaction chamber is maintained. (The reaction chamber used in the production of nanoparticles in accordance with the methodology described in the aforementioned commonly owned U.S. Pat. No. 6,777,639 operates slightly above atmospheric pressure.) Similarly, a check valve assembly 21 is activated when the electrode is removed from the conductor/coolant manifold 6. The conductor/coolant manifold 6 is in turn sealed to the main insulator 10 via O-rings 23. The conductor/coolant manifold 6 includes a concentric tube assembly to provide coolant channels 24 to actively cool the assembly and to allow coolant to be fed to the gripper assembly. Additionally the main insulator 10 contains a purge gas passage 25 to allow clean gases to be injected into the system. Again, in the application of an embodiment of a self-energizing electrical coupler to nanoparticle production, a purge gas may be introduced to effect the removal of particulate matter that may have inadvertently invaded the interstices in the coupler. Removal of such particulate matter in this way is, in particular, advantageous when using the coupler in conjunction with the production of nanoparticles of electrically conductive materials.

[0035] FIG. 3 shows, in further detail, a section view of the front insulator assembly 300. The purpose of the front insulator assembly 300 is to electrically isolate the gripper assembly from the flange 12. The inner insulator tube 30 is connected to the main insulator 10 and covers the connector/coolant manifold 6. In an embodiment of the present invention, inner insulator tube may be made of polycarbonate. The annular area formed between the inner insulator tube 30 and the connector/coolant manifold 6 provides the purge gas flow channel 31, which connects to the purge gas outlet holes 32. The purge gas flow channel 31 is sealed on the end by the insulator flange bushing 33 with O-rings 34, which insure the purge gas exits the outlet holes 32. Once the purge gas exits the outlet holes 32, it is contained by the outer insulator shield tube 35, which also redirects the purge gas towards the flange 12. In an embodiment of the present invention, outer insulator shield tube 35 may be made of polycarbonate. As previously discussed, during metal nanoparticles production this may be particularly advantageous because it prevents the conductive particles from coating the insulator and forming a conductive electrical path that could be detrimental to the system. The outer insulator shield tube

35 is held in place by the front insulator flange **36** and sealed by O-rings (not shown) retained in O-ring grooves **34**. In an embodiment of the present invention, the insulator shield tube **35** is axially fixed by O-rings. Additionally the front insulator flange **36** is connected to the inner insulator tube **30**. In one embodiment of the invention, the front insulator flange **36** is made of MDS-filled nylon.

[0036] During the production of nanoparticles, a hot plasma is formed at the tips of the electrodes, such as electrode **1** as shown in **FIG. 1**. In an embodiment used in the production of nanoparticles, an insulator thermal shield **37** may be used to protect the front insulator flange **36** from the thermal radiation of the plasma. The insulator thermal shield plate **37** is held in place by bolts **38** and offset from the front insulator flange **36** by Teflon (PTFE) standoff bushings **39**.

[0037] **FIG. 4** depicts an external side view of the gripper assembly **8**. The gripper assembly is where the electrical current passes from the connector/coolant manifold **6** to the consumable electrode **1**. The pivot plate **51** attaches the gripper assembly to the connector/coolant manifold **6** using bolts **50**. The gripper assembly is comprised of two gripper arms **52** (also called "gripper wedges"), two replaceable contact inserts **53** and two hydraulic cylinders **54**. In operation, the electrical current passes through the connector/coolant manifold **6**, is divided between the two gripper arms **52**, and then passes through the replaceable inserts **53** into the electrode **1**. Replaceable inserts **35** may be fabricated from metal-impregnated graphite (such as one manufactured by Poco Graphite of Decatur, Tex.). Additional details are described in **FIGS. 5 and 6**. Gripper arms **52** pivot on two pivot pins (not shown) disposed beneath pivot pin shield covers **96**. In this way, a dynamically adaptive contact force may be applied between inserts **53** and electrode **1** as the current through the connector increases. This will be described further in conjunction with **FIG. 6**, hereinbelow.

[0038] Because of the ohmic heating associated with high currents and, in an embodiment of the present invention used in the production of nanoparticles, heating of the components can become an issue due to radiation from the plasma. To address this issue, the gripper arms **52** are actively cooled. Coolant passes from the connector/coolant manifold **6** through coolant hose **56**, which is connected using compression fittings **55**.

[0039] **FIG. 5** show a cutaway view of the gripper assembly **8** in which a portion of pivot plate **51** and the underlying pivot mechanism, and internal electrode support structures have been removed to illustrate the disposition of the electrode within gripper assembly **8** in further detail. Additionally a portion of gripper arms **52** has also been removed to illustrate the flow path of the coolant channels **70** within the gripper assembly. The channels may be drilled from the top into the body of the gripper arm and then connected by cross-drilling through both holes. The cross-drilled hole is then plugged using a pipe plug **71** to provide a circular flow path through the gripper arm **52**.

[0040] The mechanism for retaining the replaceable contact inserts **53** within the gripper assembly are also visible in **FIG. 5**. The gripper arm contains a dovetail groove **72** that is matched to a dovetail on the replaceable contact insert **53**. To replace the insert, the replaceable contact insert **53** is slid starting at the front of the gripper arm into the dovetail

groove **72**. The contact retaining block **79** is then slid between the replaceable insert **53** and the gripper arm and is held in place by the spring plunger **73**. Additionally, the inside of the dovetail groove is lined with felt metal (such as a material from Technetics Corp., DeLand, Fla., that resembles typical felt but is made from copper). This felt metal insures that there are multiple, compliant contact points, which allows for greater surface variances between the two components. As previously described, the replaceable contact insert **53** is made from graphite impregnated with a metal of good electrical conductivity such as copper or silver. These particular materials have good lubricity and electrical conductivity.

[0041] **FIG. 10** shows a close-up view of the contact insert. Each contact insert **53** has approximately 150 degrees of contact on the diameter of the electrode. This is done so that as the inserts wear, they can slide past another. Consequently, large amounts of wear can be tolerated. If the contact inserts do not slide past one another, as they wear, they would eventually contact one another. This would then render the design ineffective. While the contact area is 150 degrees for the preferred embodiment, one skilled in the art would recognize that other angles could be used as well as other designs that prevent the contact inserts from coming into contact with one another without deviating from the spirit of the design.

[0042] **FIG. 5** also depicts the passage of electrode **1** through the gripper assembly. As the electrode passes through the connector/coolant manifold **6**, it is insulated and guided by the electrode guide tube **76**. Attached to the end of the electrode guide tube **76** is the insulating electrode guide bushing **77** which insures that the electrode is in the correct position to enter the replaceable contact inserts **53**. In an embodiment of the present invention, the insulating electrode guide bushing **77** is made from a good insulating material such as Garolite G-10 and is protected from the high thermal loads by the electrode guide thermal shield **78**, which may be comprised of stainless steel.

[0043] **FIG. 6** illustrates a cutaway view of gripper assembly **8**. In **FIG. 6**, the pivot plate **51** has been removed to expose the pivoting mechanism of the gripper assembly. Each gripper arm **52** pivots with the pivot pins **90**, which are pressed into the gripper arm **52**. Two gripper-centering gears **91** are positioned around the pivot pins **90** and connected to the gripper arms **52** by means of bolt **92**. The gripper centering gears **91** ensure that the gripper arms **52** stay centered and move equally relative to the electrode **1**. Pivot O-ring **93** and the pivot O-ring cover ring **94** seal dust and other foreign materials out of the pivot connections. In an embodiment used in the production of nanomaterials, such sealing of the pivot connections may be advantageous. Similarly, the gripper centering gears are protected from the hot plasma by the gear shield plate **95**. Pivot pin shield cover **96** held in place by bolt **97** is used to seal the pivot pin connection. **FIG. 6** also shows a cutaway of one of the hydraulic cylinders **54** that are used to actuate the grippers and apply the initial preload force to the electrode **1**. The hydraulic cylinders are held in place by and pivot around bolt **100**. Inside the hydraulic cylinder is a hydraulic piston **101** which seals using the O-rings **102** and Teflon (PTFE) back-up rings **103**. A hydraulic pressure line (not shown) is connected to the hydraulic cylinders **54** via the hydraulic connections **104**. When pressure is applied to the hydraulic

cylinders, a force is imparted on the gripper arms that causes them to rotate around the pivot pins **90**. Additionally, the force insures that there is intimate contact between the pivot pins and pivot plate for a nonarcing electrical contact. The torque generated on the gripper arm is translated into a contact force between the replaceable contact inserts **53** and the electrode **1**.

[**0044**] In operation, a hydraulic pressure is applied to the hydraulic cylinders **54**. In an embodiment of the present invention a contact force of approximately 40-80 lbs. may be maintained thereby. It would be appreciated by those of ordinary skill in the art that this range of force is exemplary and that other values may be used in alternative embodiments. In particular, a force sufficient to give the initial preload but not so great that the electrode cannot be moved through the contact inserts **53** is provided. If too much hydraulic pressure is applied, the electrode may bind or gall in the inserts or even buckle as it is fed into the gripper assembly. As would be recognized by artisans of ordinary skill, the force at which galling occurs depends on the electrode material and the insert material. For example, electrodes of softer material such as aluminum, will gall at lower preloads than harder materials such as titanium. Other factors that can influence the tendency to gall are the diameter of the electrode, surface finish, the insert material, and the electrode feed rate. Once the preload is applied to the gripper arms, the pulsed power current is applied to the connector/coolant manifold **6**. As the current rises, it passes from the connector/coolant manifold **6** and through the pivot pins **90** where it is divided into two flow paths. The current then passes through the replaceable contact inserts **53** into the electrode **1**. When the current passes through the two gripper arms, an attractive Lorentz force pulls the two gripper arms together. This additional force insures that the contact force on the electrode is sufficient to prevent arcing in the contact inserts **53**. Once the current pulse has passed, the only remaining contact force on the electrode is the hydraulic preload force and the electrode can be indexed without being damaged.

[**0045**] **FIG. 7** shows a graph of the 1 gram of force per ampere (1 g/A) according to Marshall's Law needed to maintain a nonarcing connection for high current electrical contacts. Also shown on the graph of **FIG. 7** is the initial theoretical hydraulic preload force plus the theoretical Lorentz force as a function of current for an embodiment of the present invention. (This graph reflects the force per gripper arm for an embodiment with two gripper arms). Recall that the Lorentz force arises from the current in one of the gripper arms interacting with the magnetic field produced by the current flowing through the other. Notice that the Lorentz force is proportional to the square of the current and as a result at low currents do not contribute much to the force needed to maintain a nonarcing electrical connection for the embodiments disclosed herein. However, at higher currents its contribution is more than sufficient to maintain a nonarcing electrical connection. By using a preload force that adds directly to the Lorentz force, the design maintains a sufficient force over all currents.

[**0046**] Another aspect of the design that must be considered is the response time of the grippers. Because the pulses are short in duration and the forces are relatively high, the gripper arms must be able to respond quickly to the Lorentz forces. Preferably the gripper arms have a high stiffness and

a low inertial mass. For the preferred embodiment, the triangular shape of the gripper arm provides high stiffness while minimizing the mass. Additionally, copper may be used because it has good electrical conductivity and high elastic modulus.

[**0047**] **FIGS. 8 and 9** show an external view and section view, respectively, of an alternative embodiment of the invention. In **FIG. 9** the electrode **201** passes through the conductor tube **206**, which is connected to the pulsed power system. The conductor tube **206** is contained within the insulator housing **210**, which is in turn sealed against the gripper assembly **204** by O-rings **211**. Insulators **207**, **208** and **209** electrically isolate the electrode from the conductor tube **206**. Seals **205** are used to hydraulically seal against the electrode and prevent the gas in the reactor from escaping. The end of the conductor tube **206** is electrically connected to the two halves of the gripper assembly **204**. The two halves of the gripper assembly are held together by garter springs **203**. Each half of the gripper assembly has a replaceable insert **202**, which provides the electrical connection to the electrode. The garter springs **203** also provide the preload force for the electrical connection while still allowing the electrode to slide through the inserts. In operation, the preload allows nonarcing electrical contact during the initial ramping of the current pulse. As the current increases the Lorentz force is increased due to current passing through both split halves of the gripper assembly and provides the remainder of the force to maintain a nonarcing electrical connection.

[**0048**] Although the present invention and its advantages have been described in detail, it should be understood that various changes, substitutions and alterations can be made herein without departing from the spirit and scope of the invention as defined by the appended claims. For example, the invention could use multiple arms that interact with one another or a single arm that interacts with a magnetic field to generate the Lorentz force.

What is claimed is:

1. An electrical connector providing contacts to an electrode comprising:
 - (a) at least two electrically conducting members;
 - (b) a first voltage electrically connected to the electrically conducting members; and
 - (c) an electrode electrically contacting the electrically conducting members, wherein
 - (i) the electrically conducting members apply a first preload force on said electrode and,
 - (ii) the electrical conducting members are configured to provide a second force when conducting a current to the electrode such that,
 - (A) the first preload force and the second force combine to prevent the contacts from arcing, and
 - (B) the second force is required to prevent the contacts from arcing when current is conducted to the electrode at a high current.
2. The electrical connector of claim 1, wherein the electrical conducting members are configured such that the

second force is caused by the interaction of magnetic fields generated from the current flowing in said electrically conducting members.

3. The electrical connector of claim 1, wherein there are exactly two electrically conducting members.

4. The electrical connector of claim 1, wherein the first preload force permits a relative motion of the electrode and the contacts without damage to the electrode.

5. The electrical connector of claim 1, wherein the first preload force permits a relative motion of the electrode and the contacts without galling the electrode, buckling the electrode, or both.

6. The electrical connector of claim 4, wherein the electrical connector provides dynamic contacts.

7. The electrical connector of claim 1, wherein a portion of at least one of the electrical conducting members includes a replaceable contact block forming the electrical contact with the electrode.

8. The electrical connector of claim 7, wherein the replaceable contact block comprises a metal selected from the group consisting of copper, silver, nickel, and combinations thereof.

9. The electrical connector of claim 7, wherein the replaceable contact blocks comprise metal-impregnated graphite.

10. The electrical connector of claim 9, wherein the metal-impregnated graphite comprises a metal selected from the group consisting of copper, silver, and combinations thereof.

11. The electrical connector of claim 1 further comprising a spring operably coupled to at least one of the electrical conducting members, wherein the spring provides, at least in part, the first preload force.

12. The electrical connector of claim 1 further comprising a hydraulic cylinder containing a piston operably coupled to at least one of the electrical conducting members, wherein the hydraulic cylinder provides, at least in part, the first preload force.

13. The electrical connector of claim 1, wherein the a high current is conducted from a pulsed power delivery system.

14. The electrical connector of claim 13, wherein the pulsed power delivery system is cycled:

- (a) at a peak current at least about 10^4 A;
- (b) for pulse lengths at most about 10 ms;
- (c) at a repetition rate at least about 0.1 Hz; and
- (d) for greater than about 10^5 cycles.

15. An electrical connector providing contacts to an electrode comprising:

- (a) at least two electrically conducting members;
- (b) a first voltage electrically connected to the electrically conducting members; and
- (c) an electrode electrically contacting the electrically conducting members, wherein
 - (i) the electrically conducting members apply a first preload force on said electrode and,
 - (ii) the electrical conducting members are configured to provide a second force when conducting a current to the electrode such that,

- (A) the first preload force and the second force combine to prevent the contacts from arcing, and

- (B) the second force is required to prevent the contacts from arcing when current is conducted to the electrode at a high current density.

16. The electrical connector of claim 15, wherein the high current density is at least about $10,000$ A/cm².

17. An electrical connector providing contact to an electrode comprising:

- (a) at least one electrically conducting member;
- (b) a first voltage electrically connected to the electrically conducting member; and
- (c) an electrode electrically contacting the electrically conducting member, wherein
 - (i) the electrically conducting member applies a first preload force on said electrode and
 - (ii) the electrical conducting member is configured to interact with a magnetic field to create a second force when conducting a current to the electrode such that,
 - (A) the first preload force and the second force combine to prevent the contact from arcing, and
 - (B) the second force is required to prevent the contact from arcing when current is conducted to the electrode at a high current.

18. The electrical connector of claim 17, further comprising a magnetic device for generating the magnetic field.

19. A method comprising the steps of:

- (a) applying a first preload force to at least one electrically conducting member to contact the electrical conducting member to an electrode; and
- (b) applying current through the electrically conducting member to the electrode to provide a second force such that,
 - (i) the first preload force and the second force prevents contact from the electrically conducting member and the electrode from arcing when current is applied, and
 - (ii) the second force is required to prevent the contact from arcing when current is conducted to the electrode at a high currents.

20. The method of claim 19, wherein:

- (a) the applying the first preload force step comprises applying a first preload force to at least two electrically conducting members; and
- (b) the applying the current step comprises applying current through the two electrically conducting members to the electrode such that,
 - (i) the first preload force and the second force prevents contacts from the electrically conducting members and the electrode from arcing when current is applied, and
 - (ii) the second force is required to prevent the contacts from arcing when current is conducted to the electrode at the high currents.

21. The method of claim 19, further comprising applying a magnetic field to interact with the magnetic field generated from the current flowing in the electrically conductive member to provide the second force.

22. The method of claim 19, wherein the high current is conducted from a pulsed power delivery system.

23. The method of claim 22, wherein the pulsed power delivery system is cycled:

- (a) at a peak current at least about 10^4 A;
- (b) for pulse lengths at most about 10 ms;
- (c) at a repetition rate at least about 0.1 Hz; and
- (d) for greater than about 10^5 cycles.

24. A method comprising the steps of:

- (a) applying a first preload force to at least one electrically conducting member to contact the electrical conducting member to an electrode; and
- (b) applying current through the electrically conducting member to the electrode to provide a second force such that,
 - (i) the first preload force and the second force prevents contact from the electrically conducting member and the electrode from arcing when current is applied, and
 - (ii) the second force is required to prevent the contact from arcing when current is conducted to the electrode at a high current density.

* * * * *